

HAND TURNED CEILING ROSE

TECHNICAL DATA


Standard	BS 67
Rating	6 Amp 250V~
Terminal Capacity	4 x 1.0mm ² 3 x 1.5mm ² 1 x 2.5mm ²
Fixing Centre	50.8mm
Large capacity earth terminal with locking terminal screw	

FITTING INSTRUCTIONS


If you are in doubt how to proceed, consult a qualified electrician.

1. Isolate electricity supply and remove fuse in the fuse box or switch off the circuit breaker in the consumer unit before removing existing fittings.
2. Verify no mains voltage is present at existing ceiling rose using a neon tester or meter.
3. Remove your existing ceiling rose.
4. Unscrew the hand turned dome from the base and feed the cable through the aperture in the base, increase entry size if necessary.
5. Securely screw the base unit to a ceiling joist or wall, as appropriate. Take care to avoid existing wiring or pipe work. When fitted correctly and using 0.75mm 2 core circular cable, the ceiling rose is designed to carry fittings with a maximum weight of 3kg. Install the cables to the appropriate terminals.
6. To assist with the correct installation of this ceiling rose please consult the appropriate wiring diagram supplied of the two typical installation methods.
7. Fit the cables around the cable restraints as shown in the illustration below.
8. Screw the hand turned rose cover back into place.
9. The ceiling rose is now ready for use once electricity has been restored.

CEILING SWITCH - 1 WAY

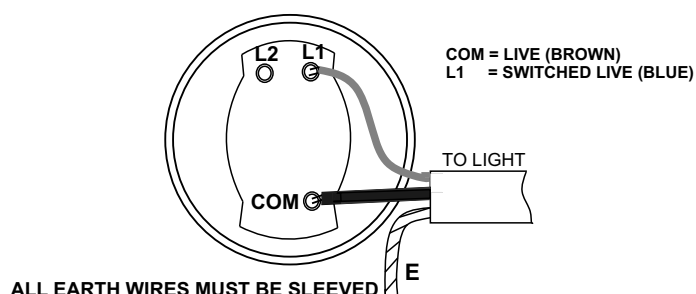

CABLE RESTRAINTS



CEILING SWITCH - 2 WAY

