



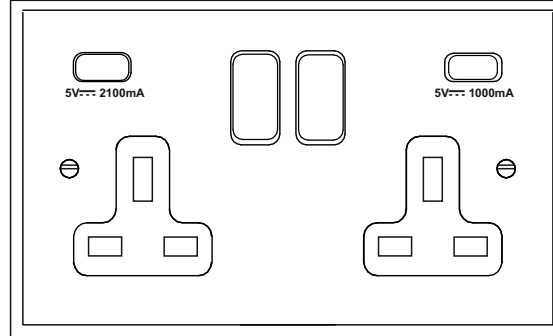


switchto**wood**

## Switched USB Socket specification sheet




### Switched USB socket wiring diagrams

1 gang USB Switched Socket  
single pole

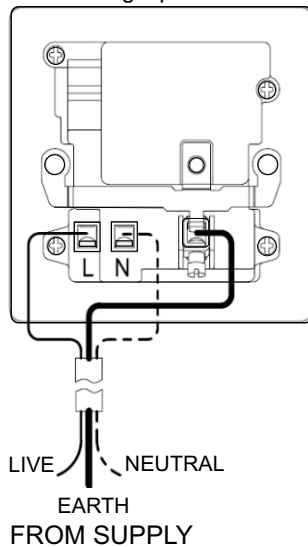

2 gang USB Switched socket  
single pole

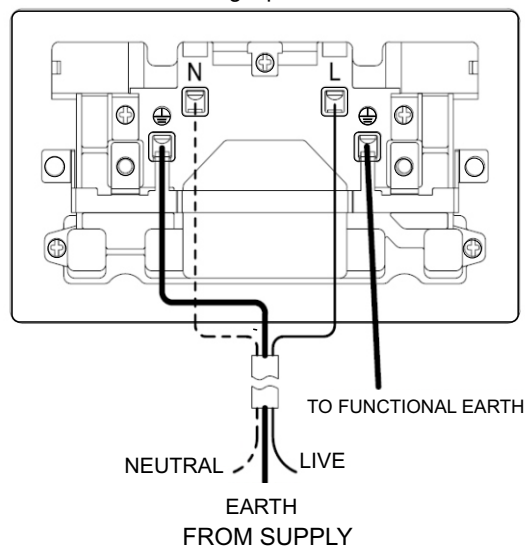

## Technical Specifications

Standards	BS 1363, BS EN 62368
Rating	13 Amp, 250V
Switch Type	Single Pole
USB Amperage 2G Socket	3.1 Amp
USB Amperage 1G Socket	2.1 Amp
Contact Gap	Normal Gap
Terminal Capacity	3x 2.5mm <sup>2</sup> , 3x 4.0mm <sup>2</sup> , 2x 6.0mm <sup>2</sup>
Mounting Box Depth (Min)	35mm
Fixing Centres	60.3mm, 120.6mm
Product Class 1	Face plate must be earthed
Ambient operating temperature	-5 to +40 C
Recommended Location	Internal Use Only
Maximum Installation Altitude	2000m
IP Rating	IP2XD