

Technical Specification: Dual Voltage Shaver Sockets



CATEGORY:

SHAVER SOCKET

Insert Ref:

13/1 Shaver Dual Voltage Unswitched Socket
Vertically mounted


TECHNICAL SPECIFICATION:

Current rating:	20VA	Location:	Internal Use Only
Voltage:	220/250V AC	Max Installation Altitude:	2000m
Max Load Output:	115/230V	Box Depth:	47mm
Max Load Input:	200/250V		
IP Rating:	IP2XD	Standard Switch to Wood electrical accessories are designed to be mounted onto BS4662-2006 flush wall boxes	
Switched Poles:	None		
Contact Gap Minimum	None		
Product Class 1:	Must be earthed		
Ambient operating Temperature:	-5 to +40 C	BS EN ISO Standard:	BS EN 61558
Shuttered	Yes		BS 4573

	1mm ²	1.5mm ²	2.5mm ²	4mm ² Multi-Strand	6mm ²
Terminal Capacity	5	4	3	2	1
Earth Terminal Capacity	9	6	4	2	1

Plate Fixing Centres:

Twin Plate - 120.6mm, Vertically Mounted

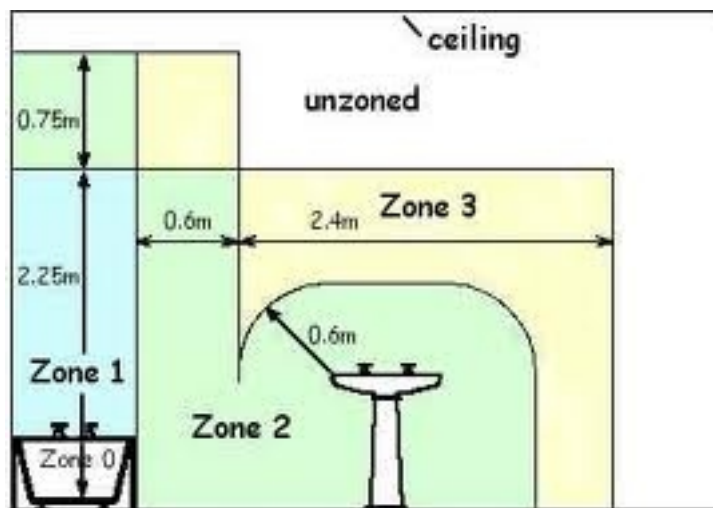

Bathroom Safety:-

Note:- Generally shaver sockets won't have an IP (ingress protection) rating, but if they comply with BS EN 61558 they can safely be installed in zone 2, as long as they are away from the bath or shower unit and are unlikely to come into contact with shower spray.